



safety 

# approved flashlights

## Special Bulb Assembly

These approved Fulton models contain a special "circuit breaker" spring assembly which instantly disconnects the bulb from the battery in the event of a broken bulb. A potential explosion is averted since the filament is instantly disconnected, preventing a potential spark hazard.

It's easy to drop a flashlight, breaking the bulb. When this happens the filament is exposed to the atmosphere, sometimes with the filament continuing to burn for a moment... and this moment is enough to create the potential of an explosion if the atmosphere is explosive.


All Fulton flashlights are black with yellow fittings, as called out by U.S. government specifications.



Assembly shown ready for use with spring compressed.



When bulb breaks spring expands to disconnect broken bulb from battery.

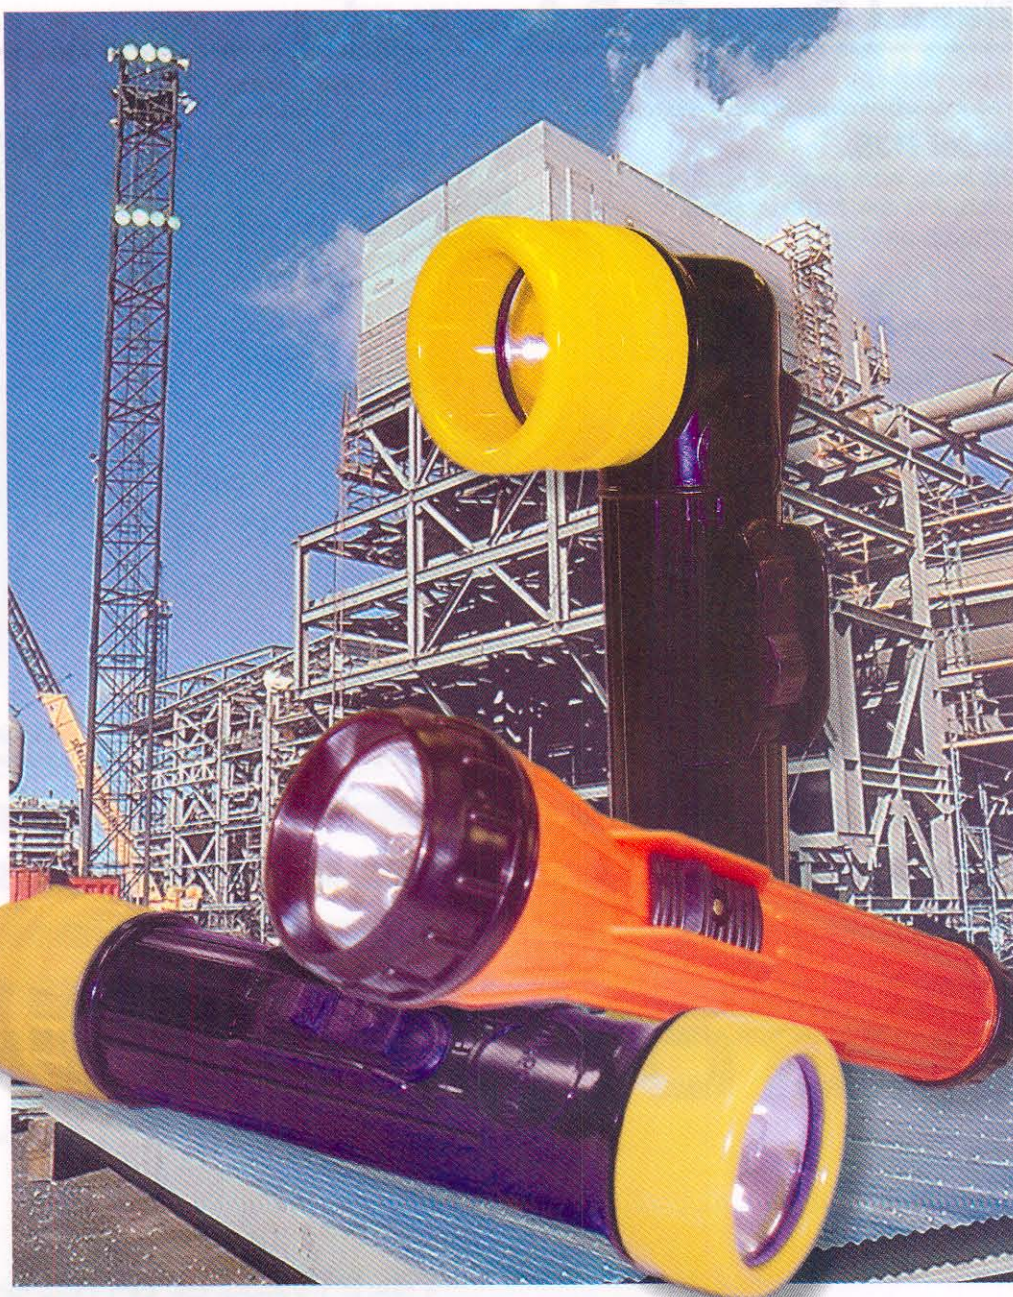



## Class II Group G and Class I Group C, D Approved

**Approved for hazardous areas of atmosphere containing grain dust, flour, starch, combustible plastics, hazardous vapors and gases.**

For use in the following explosive atmospheres only, gasoline, petroleum, naphtha, alcohol, acetone, lacquer solvent vapors, and natural gas.

### Model 912

2 D Cell Safety Approved 900 series light. Alkaline/Carbon Zinc

### Model 911

Same as 912, Waterproof, 3-position Switch, Alkaline/Carbon Zinc

### Model 933

3 D Cell Safety Approved 900 series light. Alkaline/Carbon Zinc

### Model 932

Same as 933, Waterproof, 3 position Switch. Alkaline/Carbon Zinc



## Class I Group C, D Approved

**Approved for areas of atmosphere with hazardous vapors and gases.**

For use in the following explosive atmospheres only, gasoline, petroleum, naphtha, alcohol, acetone, lacquer solvent vapors, and natural gas.

### Model N35

ABS body, waterproof, 3 position switch, 2 D cell. National Stock #6230-00-269-3034

### Model N44

Right angle light, ABS body, waterproof, 3 position switch, 2 D cell. National Stock #6230-00-161-6422

### Model N35-2

Fire retardant, waterproof, 3 position switch, 2 D cell. National Stock #6230-00-299-3035

### Model N33-2

Fire retardant, waterproof, 2 position switch, 3 D cell. National Stock #6230-00-270-5417



Model #	# of Batteries	Standard	Waterproof	Carbon Zinc Approved	Alkaline Approved	Type I Group C&D	Type II Group G
911	2 cell		x	x	x	x	x
912	2 cell	x		x	x	x	x
932	3 cell		x	x	x	x	x
933	3 cell	x		x	x	x	x
N35-2	2 cell		x	x	x	x	
N33-2	3 cell		x	x		x	
N35	2 cell		x	x	x	x	
N44	2 cell		x	x	x	x	

# FULTON

Call TOLL FREE 1-800-537-5012

In Ohio Call 1-419-335-3015

FAX 419-335-3215

email sales@fultonindoh.com



FULTON INDUSTRIES INC.

135 E. Linfoot St. P.O. Box 377, Wauseon, OH 43567

www.fultonindoh.com